


## TSA/PR 180 - 300




### Standard Equipment

- 3 points ISO universal hitch with 2nd category fork , double headstock for front and rear use
- Gearbox with free wheel 1000', 2 pto, mod. Vigolo L810 (TSA/PR 180-250)
- Gearbox with free wheel 1000', 2 pto, mod. Vigolo E810 (TSA/PR 280/300)
- Arrangement for version 540' with inversion of the pulleys
- Triple counter-knife
- Hydraulic side shift
- Rear roller adjustable in height with scraper, increased bearings
- Direct cardan shaft (tractor side fork 1" 3/8 Z6)
- Front protection flaps
- EC guard kit


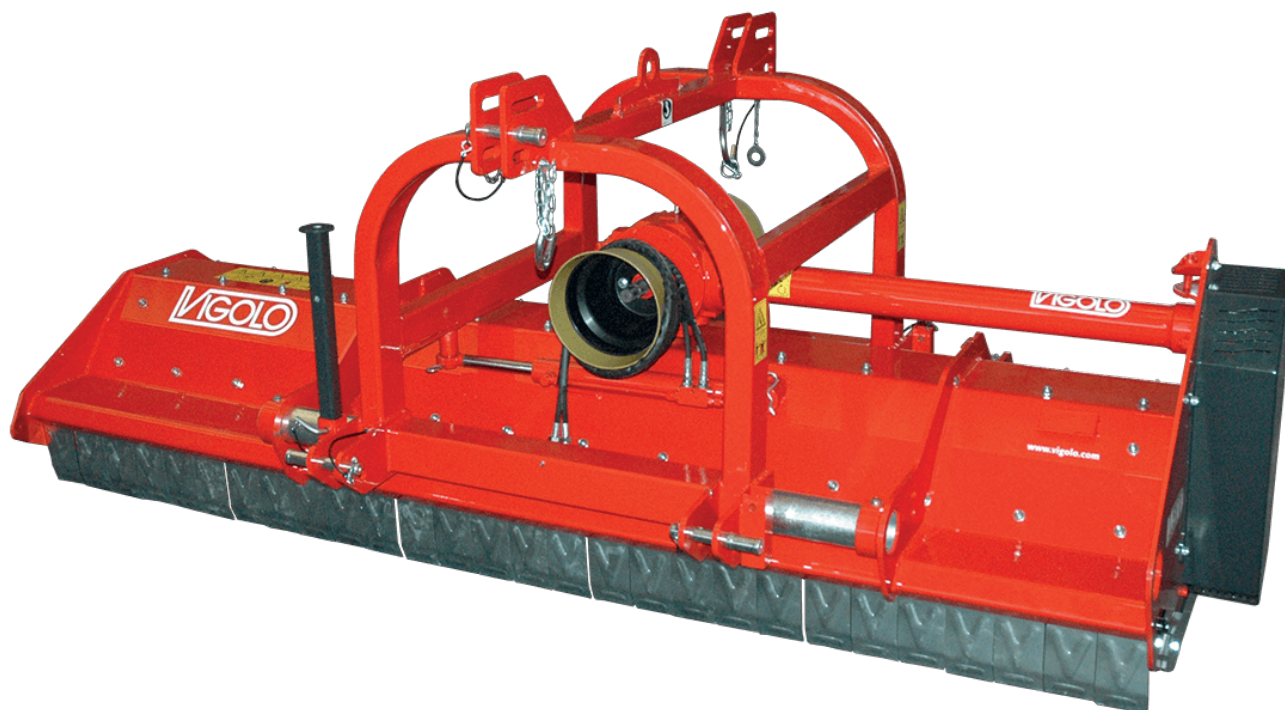







### VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale  
Via dell'Industria, 27/A  
36045 Alonte (VI) - ITALY  
Tel. +39 0444 436247  
Fax +39 0444 436237  
[www.vigolo.com](http://www.vigolo.com) - [info@vigolo.com](mailto:info@vigolo.com)



Supporto forgiato  
Cast lug  
Geschmiedeter Träger  
Support forgé



| Mod.       | <br>Lavoro<br>mm | <br>Ingombro<br>mm | <br>HP<br>min - max | <br>Kg |  |  |  | <br>± 200 | <br>5 |
|------------|---|---|--|---|---|--|---|--|--|
| TSA/PR 180 | 1800  | 1970  | 50-120   | 700   | 16  | 40   | 34  | ± 200  | 5  |
| TSA/PR 200 | 2000  | 2170  | 50-120   | 750   | 18  | 44   | 38  | ± 200  | 5  |
| TSA/PR 220 | 2200  | 2370  | 50-120   | 810   | 20  | 48   | 40  | ± 200  | 5  |
| TSA/PR 250 | 2500  | 2670  | 60-120   | 880   | 22  | 56   | 48  | ± 200  | 5  |
| TSA/PR 280 | 2800  | 2990  | 70-180   | 960   | 24  | 64   | 52  | ± 200  | 6  |
| TSA/PR 300 | 3000  | 3190  | 80-180   | 1040  | 28  | 68   | 56  | ± 200  | 6  |

## VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale  
Via dell'Industria, 27/A  
36045 Alonte (VI) - ITALY  
Tel. +39 0444 436247  
Fax +39 0444 436237  
www.vigolo.com - info@vigolo.com